


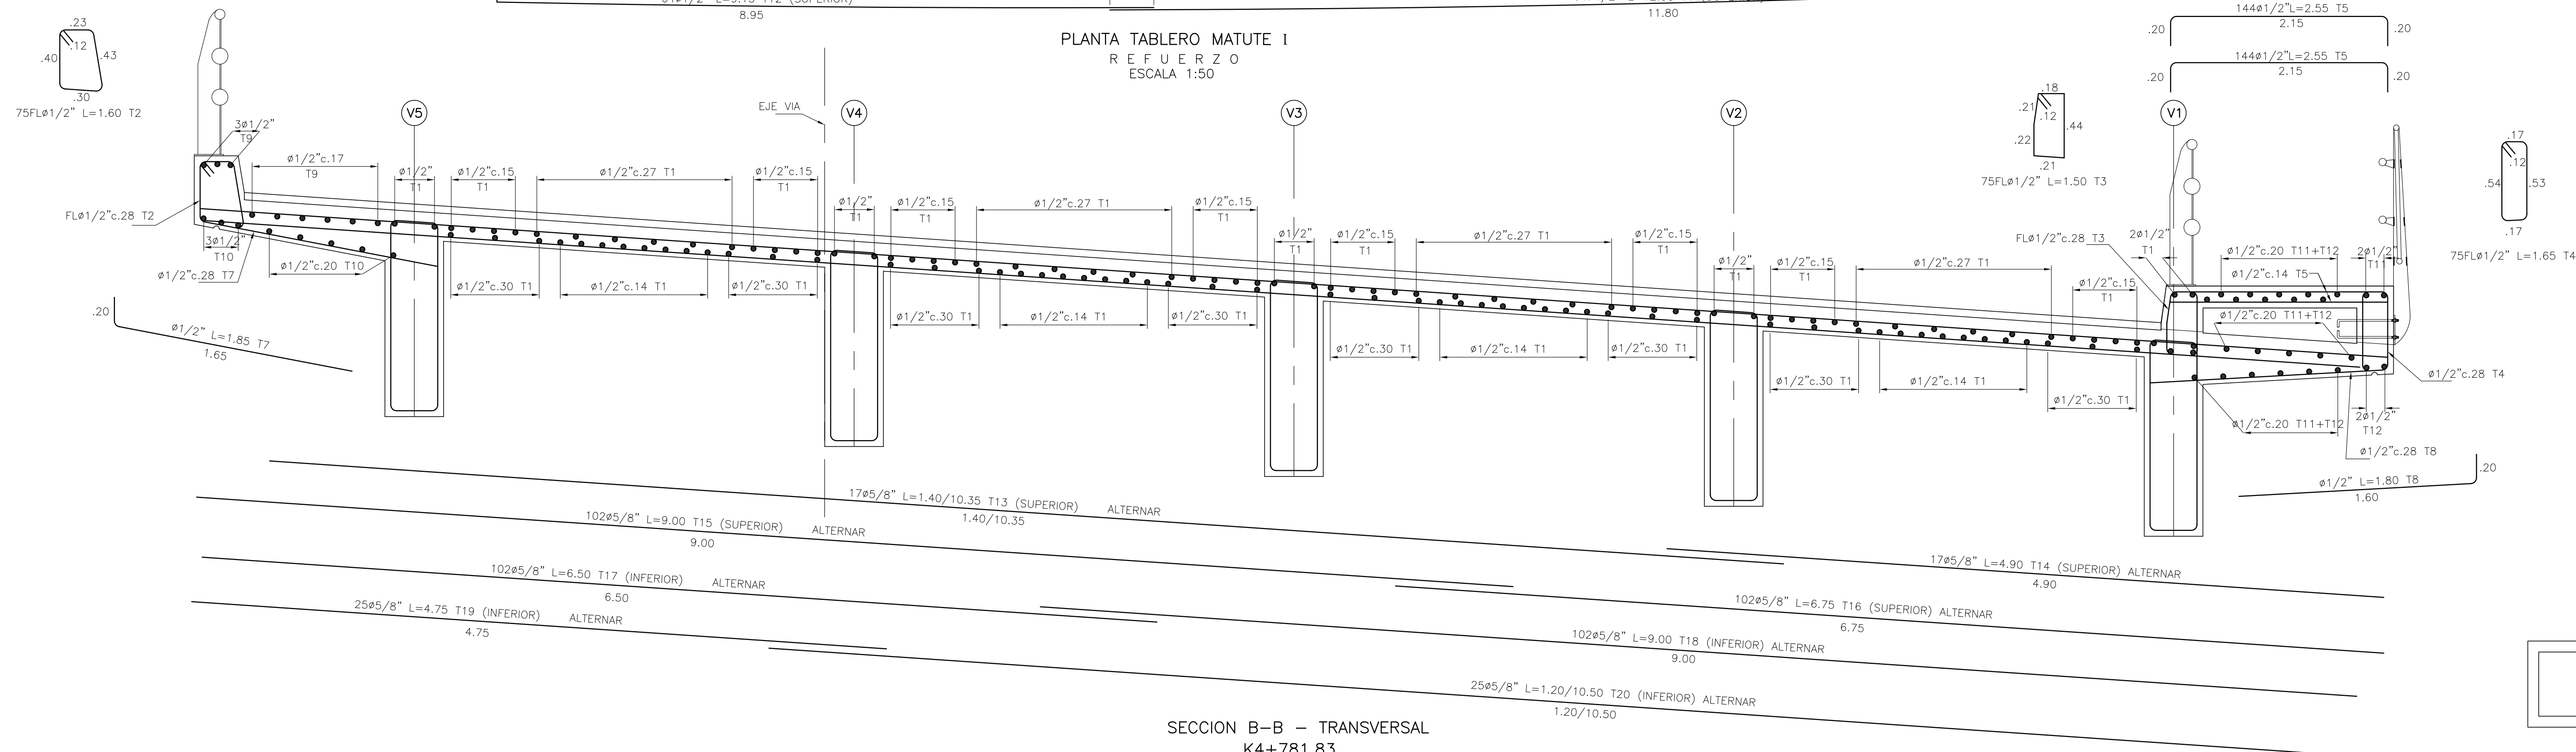
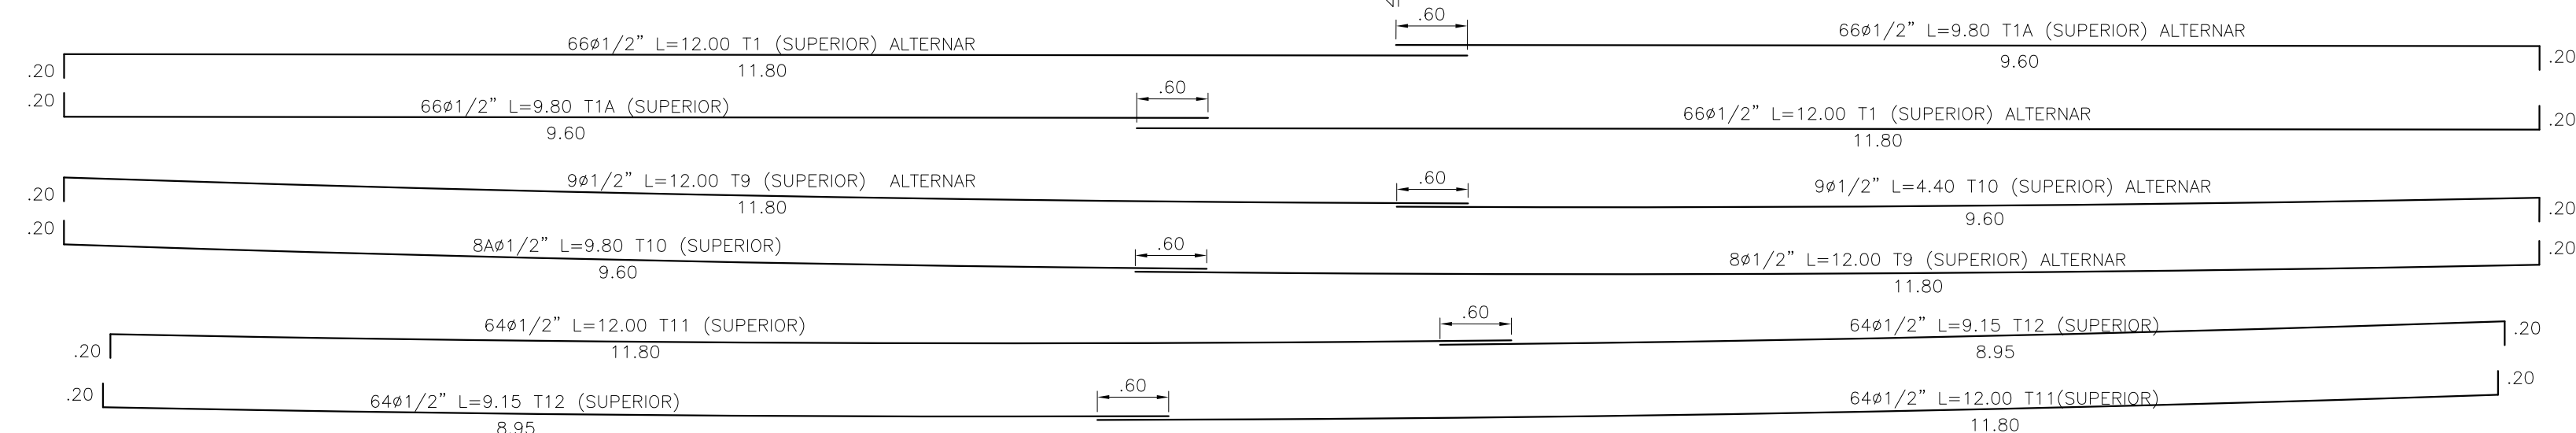


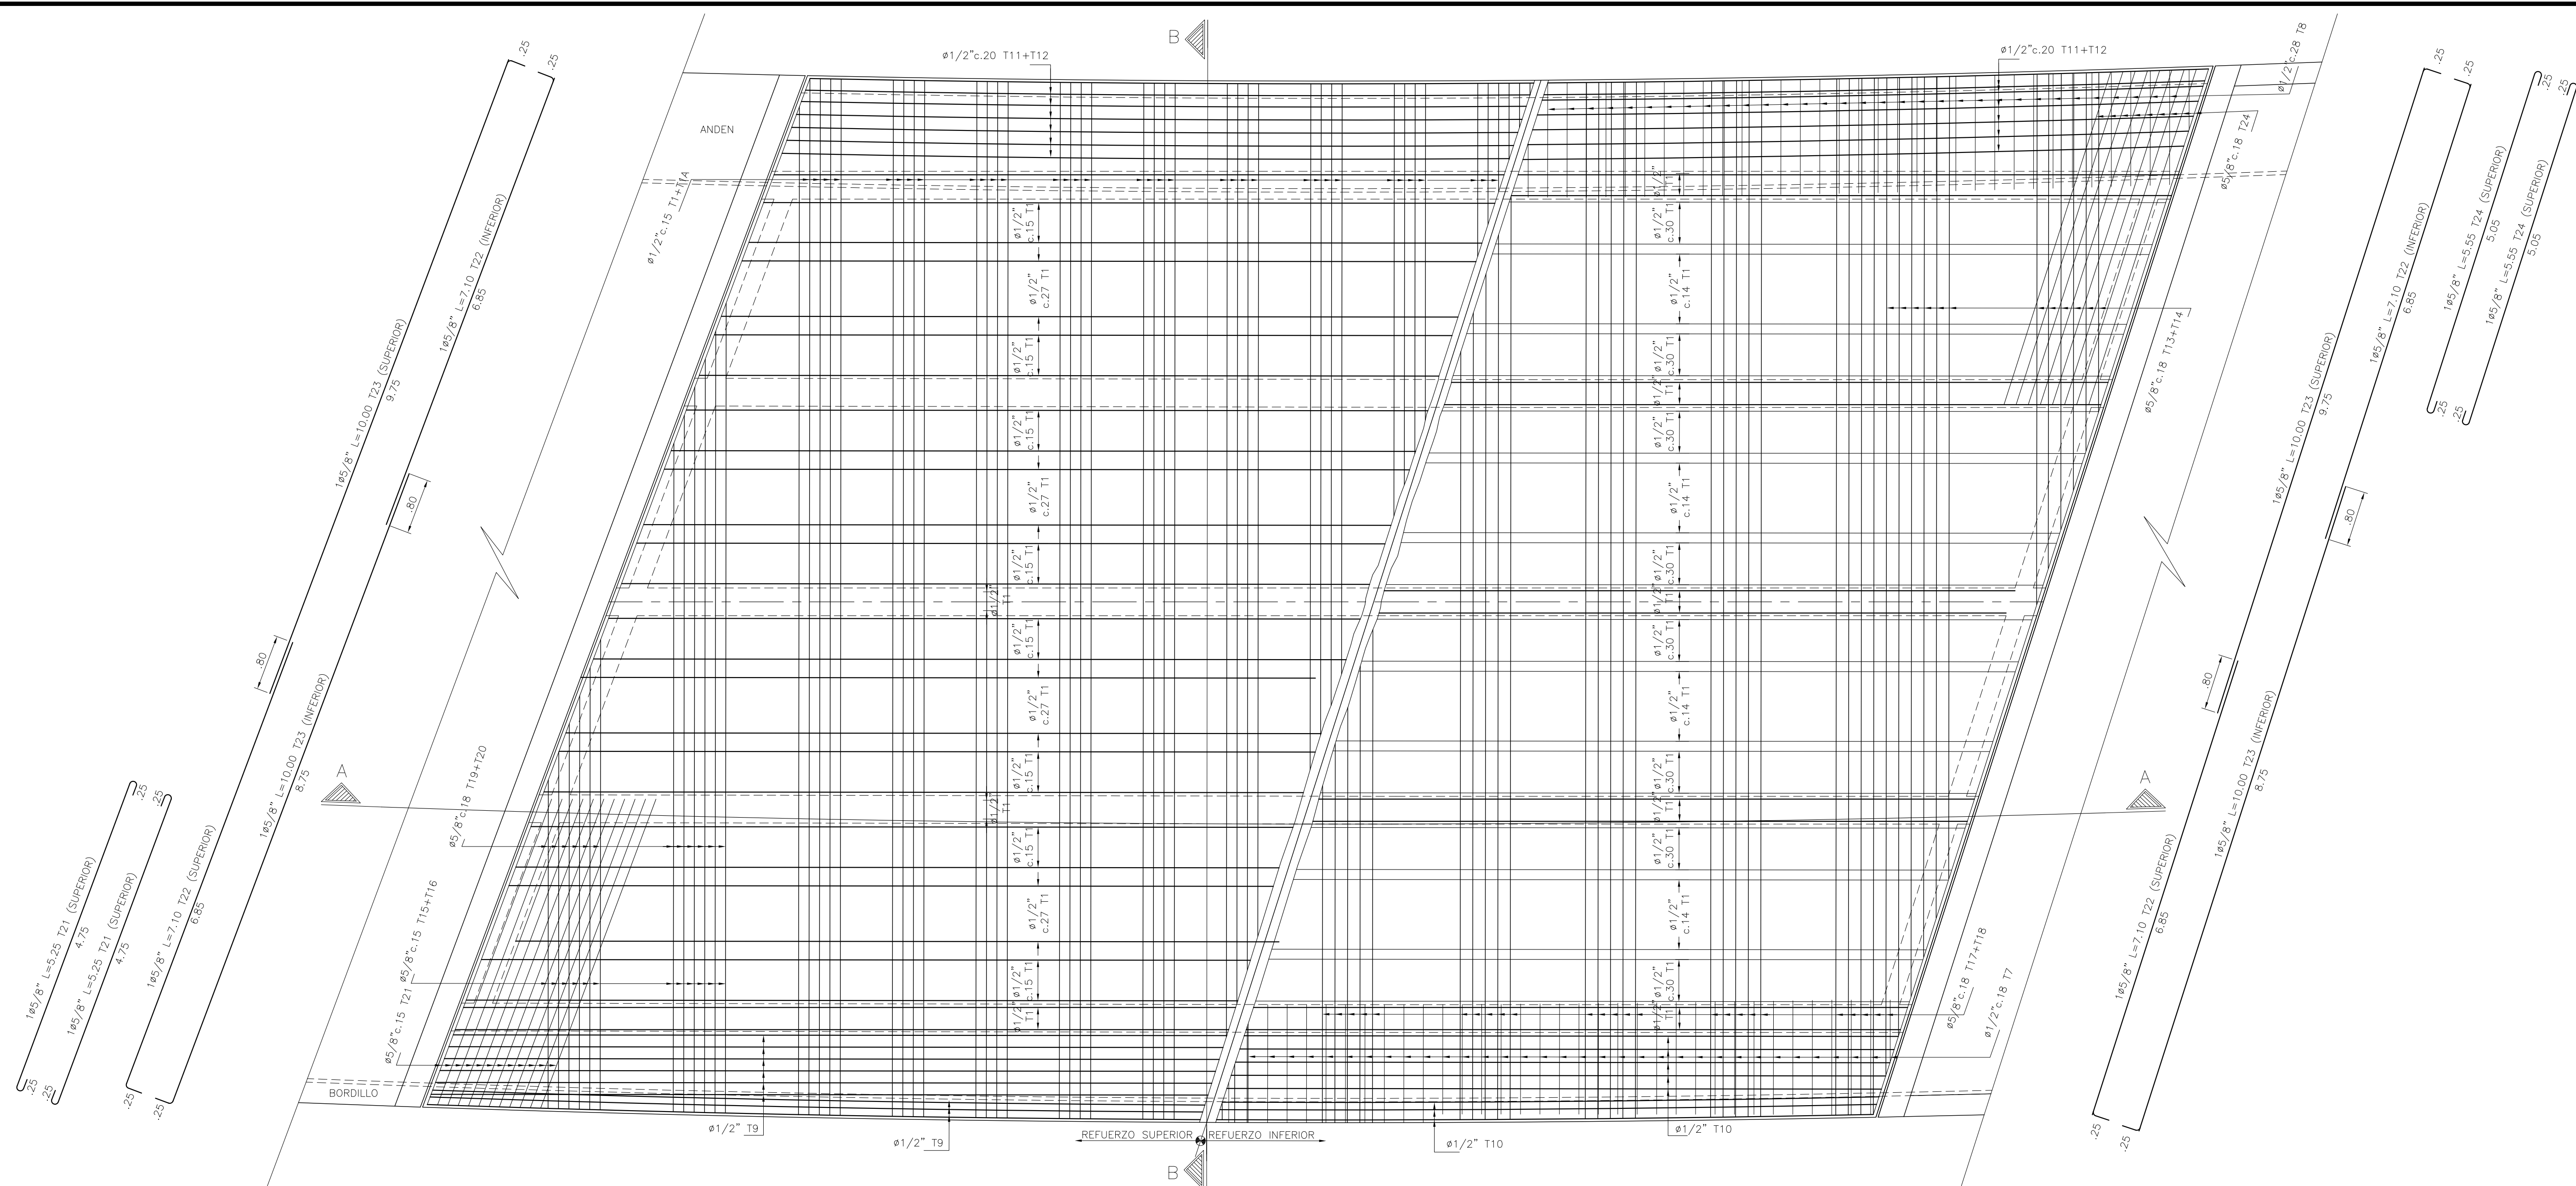

CANTIDAD DE MATERIAL					
TABLERO MATUTE I					
Diámetro Ø	Tipo	Forma	Cantidad	Longitud (m)	Peso (Kg)
1/2"	T1		66	12.00	3332.20
1/2"	T1A		66	9.80	
1/2"	T2		75	1.60	
1/2"	T3		75	1.50	
1/2"	T4		75	1.65	
1/2"	T5		288	2.55	
1/2"	T6		12	0.80 / 1.60	
1/2"	T7		75	1.85	
1/2"	T8		75	1.80	
1/2"	T9		17	12.00	
1/2"	T10		17	9.80	359.26
1/2"	T11		12	12.00	
5/8"	T12		13	9.15	
5/8"	T13		17	1.40 / 10.35	
5/8"	T14		17	4.90	
5/8"	T15		102	9.00	
5/8"	T16		102	5.75	
5/8"	T17		102	6.50	
5/8"	T18		102	9.00	
5/8"	T19		25	4.75	
5/8"	T20		25	1.20 / 10.50	
5/8"	T21		2	5.25	
5/8"	T22		4	7.10	
5/8"	T23		4	10.00	
5/8"	T24		2	5.55	
ACERO DE REFUERZO fy 4200 kg/cm² =					3691 Kg
VOLUMEN DE CONCRETO TABLERO f'c 210 kg/cm² =					66.66 m³
VOLUMEN DE CONCRETO ANDEN Y BORDILLO f'c 210 kg/cm² =					8.71 m³

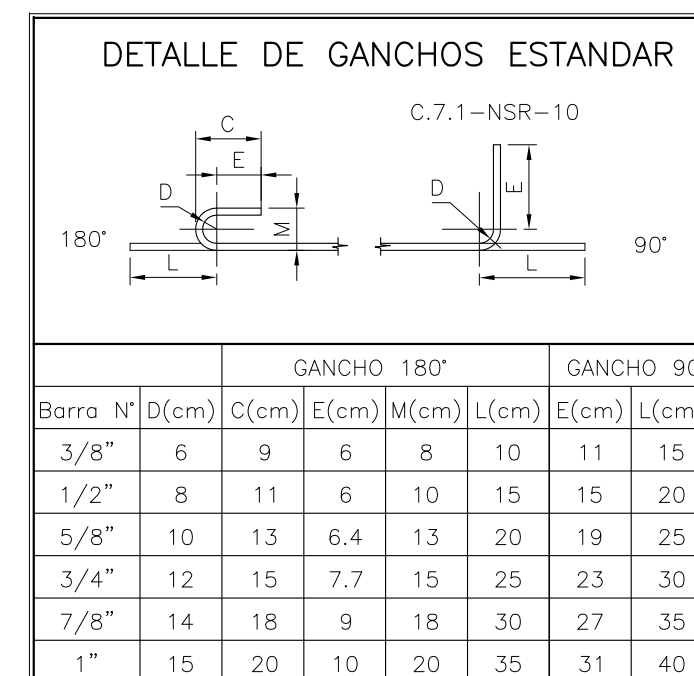

CUADRO DE TRASLAPOS MINIMOS A TRACCION		
No.	Ø	TRASLAPLO
3	3/8"	0.40
4	1/2"	0.60
5	5/8"	0.80
6	3/4"	1.00
7	7/8"	1.20
8	1"	1.40
9	1 1/8"	1.60
10	1 1/4"	1.80

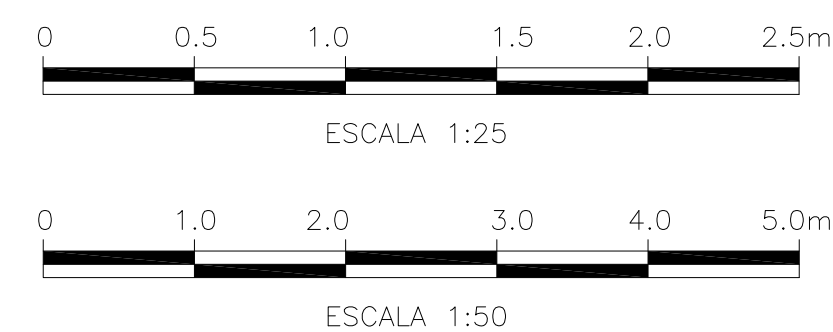

VER NOTAS PLANO 1